

# Aimpoint®

## 9000L™

Whether you are hunting deer, moose or bear, this full-length sight delivers unmatched performance and reliability. Primarily designed for rifles with standard or magnum-length actions, the 9000L can handle the most extreme hunting conditions. Like all Aimpoint sights, the 9000L is built to handle heavy recoil and is the favourite of big game rifle hunters around the world.



### Unique features of the 9000L™

- Ideal for big game and sport-shooting rifles with standard or magnum-length actions and semi-automatic rifles
- 2-ring configuration fits nearly all 30 mm ring mounting systems
- New ACET technology allows 50,000 hours of operation on one battery
- Available in 2 dot sizes (2 and 4 MOA)
- Submersible to 5 meters (15 feet)
- Also available in a fixed 2X version (only in 2 MOA)

### Standard features on all Aimpoint sights

- Unlimited field of view
- Parallax-free and unlimited eye relief
- Unaffected by extreme weather conditions
- Rugged, durable construction
- No hazardous materials
- No laser emission that could be harmful to your eyes
- Mechanical switch for speed and reliability
- Increased aiming confidence



**THE FUTURE IN SIGHT™**

**APPLICATION AREAS**

Hunters

**APPLICATION FIREARMS**

Semi-automatic rifle  
Rifle with standard length action  
Rifle with shorter action  
Scout rifle  
Combination rifle  
Drilling

Primary use  
Primary use  
Secondary use  
Secondary use  
Secondary use  
Secondary use

**TECHNOLOGY**

ACET Advanced Circuit Efficiency Technology

**OPTICAL DATA**

Reflex collimator sight  
LED (Light Emitting Diode)  
Red dot size

Red dot sight  
Totally eye-safe  
4 MOA\* (9000L)  
2 MOA\* (9000L) (9000L 2X)  
No centering required  
Unlimited  
All surfaces & multi-layer coating  
1X (9000L)  
Fixed 2X power attachment (9000L 2X)

Parallax-free  
Eye relief  
Anti-reflex coating  
Magnification

**ELECTRONIC DATA**

Battery One 3V Lithium battery, type 2L76 or DL1/3N  
Battery life 50,000 hours  
Mechanical switch Dot intensity regulator, 10 settings  
Settings 1 Off, 9 daylight

**MECHANICAL DATA**

Material housing Extruded aircraft aluminum  
Surface finish Anodised, semi-matte  
Color Carbon black  
Adjustment 1 click= 13mm at 100 meters = 1/2" at 100 yards  
Mounting solution 2 rings, 30 mm Ø

**ENVIRONMENTAL DATA**


Temperature range -30° – +60° C, -20° – +140° F  
Water resistance Submersible to 15 ft, 5 m  
Radioactive components used None

**DIMENSIONS**

Length 200 mm, 7,9" (9000L) – 235 mm, 9,3" (9000L 2X)  
Width/height 55 mm, 2,2" (9000L) – 58 mm, 2,3" (9000L 2X)  
Minimum distance between rings 60 mm, 2,4"  
Maximum distance between rings 155 mm, 6,1"  
Weight 230 g, 8,1 oz (9000L) – 300 g, 10,6 oz (9000L 2X)

**ARTICLE NUMBERS**

4 MOA 11406 (9000L)  
2 MOA 11419 (9000L), 11411 (9000L 2X)

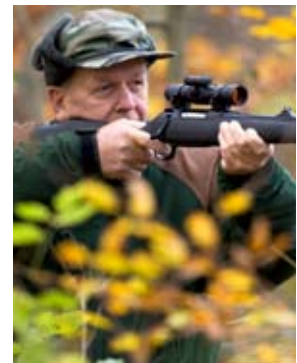

\* MOA (minute of angle) 1 MOA = 30 mm at 100 meters = 1" at 100 yards

MO0811